

FLEXLIGHT LED 1

GARRABRIDGE



Surface mounted IP54 LED luminaire. Body is made of aluminium profile and it is available in all RAL colours. Light source - custom made LED plate - OSRAM Technology included. Standard EVG ballast, DALI version on request.

IP54

230 V
50 Hz



CE

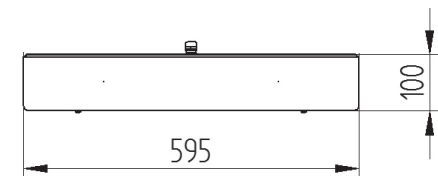

Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Weight
0000-003400.1400/840	1400 lm	16W	87 lm/W	4000K	6,38 kg
0000-003400.2000/840	2000 lm	23W	87 lm/W	4000K	6,38 kg
0000-003400.2600/840	2600 lm	33W	79 lm/W	4000K	6,38 kg
0000-003400.1350/830	1350 lm	16W	84 lm/W	3000K	6,38 kg
0000-003400.1900/830	1900 lm	23W	83 lm/W	3000K	6,38 kg
0000-003400.2500/830	2500 lm	33W	76 lm/W	3000K	6,38 kg