


Suspended decorative luminaire for LED light sources.

TECHNICAL DATA:

- Mounting:** suspended, on wire suspension (on request)
- Body:** aluminium profile
- Luminaire colour:** gray
- Diffuser:** opal plexiglass (PLX)

ELECTRICAL DATA:

- Power supply efficiency:** >76%
- Electrical connection:** 3x0,75 mm² wire
- Power:** 220-240V 50/60Hz
- Includes light source:** yes
- Type of equipment:** LED driver



OPTICAL DATA:


- Light distribution:** omnidirectional
- Way of lighting:** direct
- Reflector:** aluminum, polished, faceted

ADDITIONAL INFO:

- Available on request:** DALI
- Operating temperature range:** 0°C - 35°C
- Additional equipment:** aluminium end caps (included)
- Lifetime (L70B50):** 50 000 h

GENERAL DATA:

- Warranty:** 3 years + 2 years after project registration
- Application:** offices, hotels, reception desks, classrooms, auditorium, boutiques, museums

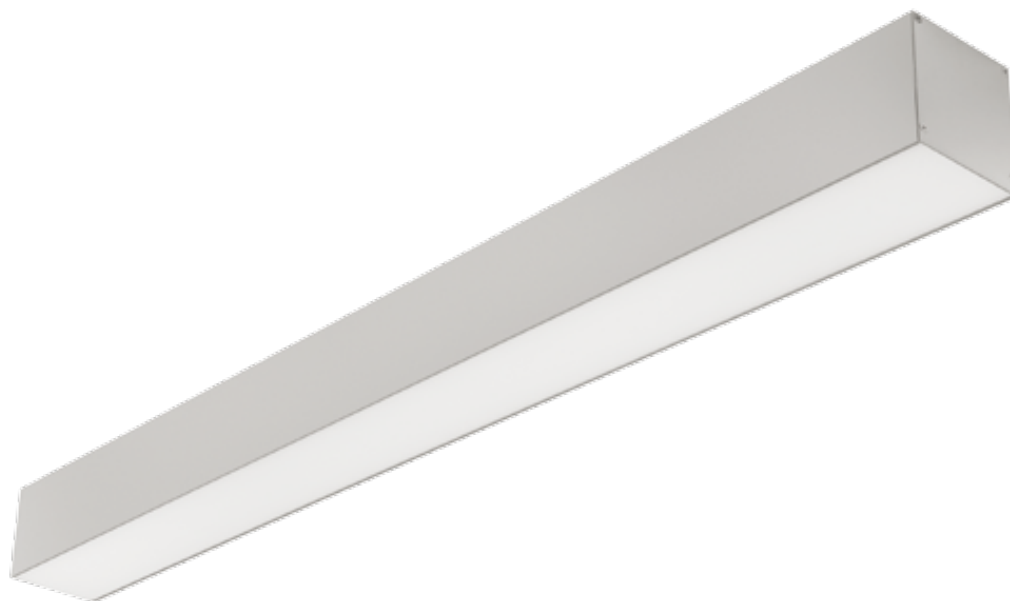

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
010322.5L01.141	26	33	3300	2250	68	3000	>80
010322.5L02.141	26	33	3400	2400	73	4000	>80
010322.5L03.141	44	49	5500	3600	73	3000	>80
010322.5L04.141	44	49	5700	3850	79	4000	>80
010322.5L05.141	31	41	4100	2750	67	3000	>80
010322.5L06.141	31	41	4250	3000	73	4000	>80
010322.5L07.141	49	61	6850	4550	75	3000	>80
010322.5L08.141	49	61	7100	4800	79	4000	>80

Code	Dimensions [mm] L W H D	Pallet quantity	Quantity in package	Net weight [kg]
010322.5L01.141	1200 80 90 960	120	1	3.5
010322.5L02.141	1200 80 90 960	120	1	3.5
010322.5L03.141	1200 80 90 960	120	1	3.5
010322.5L04.141	1200 80 90 960	120	1	3.5
010322.5L05.141	1500 80 90 1260	96	1	4.5
010322.5L06.141	1500 80 90 1260	96	1	4.5
010322.5L07.141	1500 80 90 1260	96	1	4.5
010322.5L08.141	1500 80 90 1260	96	1	4.5

